

Total Lift Bed VG-TLB425T

The **First Step** to Early Mobility



**Early Mobility at
the push of a
button**

Early...Often...Outcomes



The Other **23** Hours

Early mobility doesn't have to be just for 1 hour a day. With The TLB you can mobilize patients all day with the push of a button, with one caregiver while minimizing risk of injury to both staff and patient

Patented Weight Bearing Control System


Capture mobility progression like never before! As the bed tilts, the digital screen displays the patient's weight bearing (both actual and percentage), and the inclinometer provides angle of tilt data. Caregivers can control and progress weight bearing and upright positioning, progressing to higher levels of mobility up to and including marching and ambulation-readiness according to each patient's capability.

Integration

The Total Lift Bed integrates perfectly into existing early mobility protocols and safe patient handling programs. Through its ability to safely stand and mobilize patients, and help achieve pressure re-distribution onto the feet, and away from the buttocks and shoulders, it also integrates well with fall prevention and wound care initiatives.

Safety While Standing


A Flexible strap system helps secure the patient in position during movement and upright positioning. The material is comfortable and can be washed or discarded between patients.

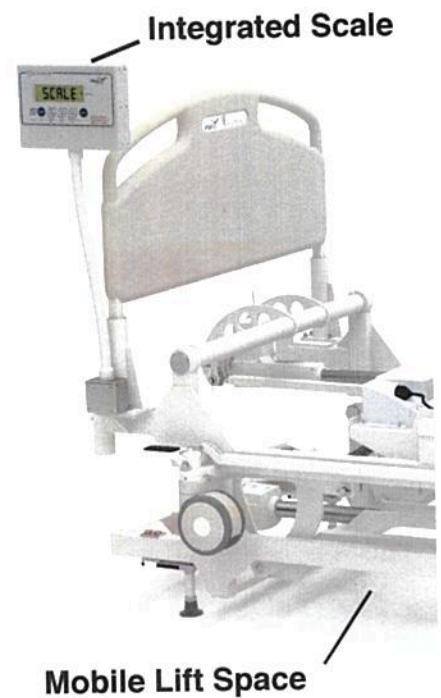



PR Release

Chair

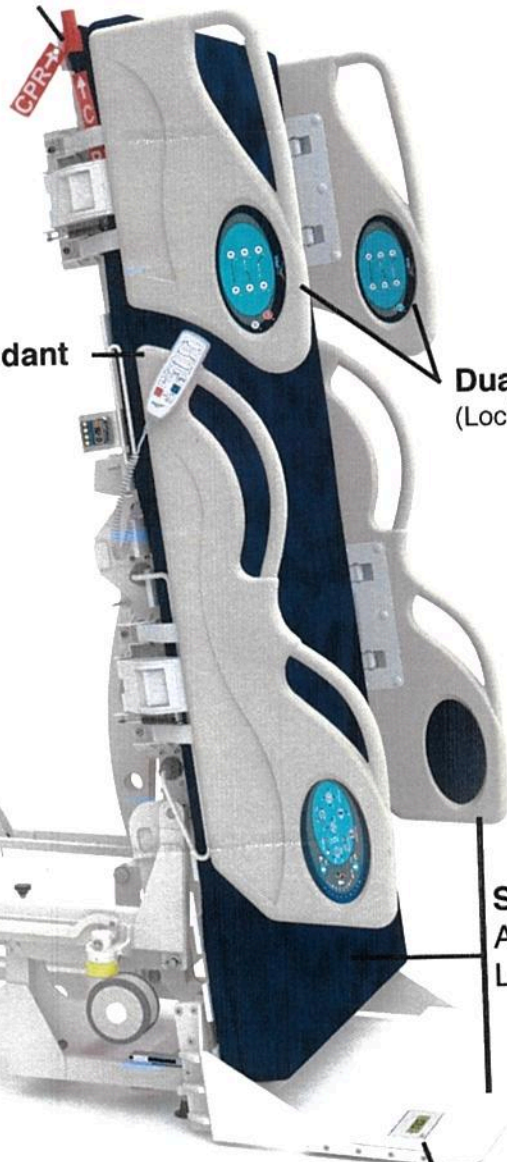


and Pendant

Dual Side Rail Controls
(Lockable by Caregiver)

Trendelenburg

Skin Integrity
Alternating Pressure,
Low Air Loss, Foam

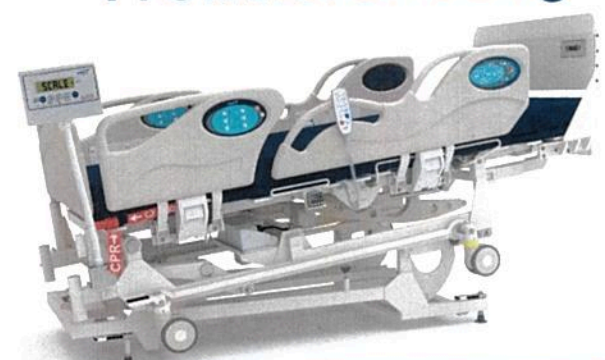

Bio-Feedback Display

Total Lift Bed Bariatric
Also Available In Bariatric Version
with a 1000LB/425KG Weight
capacity



VitalGo Spec Sheet TLB 425T

Revision Date: 12/9/2015

Manufacturer: VitalGo

Manufacture Location: Fort Lauderdale, FL USA

Manufacturer Contact: Jarett Armstrong

Company since: 2007

Model # 425T


Model Description: Early Mobility Deck

Model on Market Since: January 2015

Model Generation: Third Generation

Specifications:

Overall Length (neutral position)	85.83 " (218cm)
Overall Length (fully extended)	89.76" (228cm)
Overall Width	40.95" (104cm)
Overall Width (without siderails)	37.00" (94cm)
Deck to Floor (low position)	20.67" (52.5cm)
Deck to Floor (high position)	29.72" (75.5cm)
Standing Position (top to floor)	88.00" (223.5cm)
Casters	05.00" (12.70cm)
Under Bed Clearance	05.50" (14.00cm)
User Weight Capacity	425lbs (193kg)
Maximum Safe Loading Capacity	616LB (280KG)

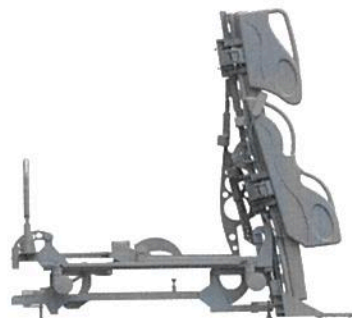

Voltage	100V-AC/120V-AC/230V
AC Current	6.8A Max/5A Max/3A
Max Frequency	50-60HZ/60Hz/50HZ
Power	200W/280W/280W
Ambient Temperature in Operation	50°F (+10°) to 104°F (+40°C)
Relative Humidity Range	30%-70%
Atmospheric Pressure Range	700hPa-1060hPa




Features:

Full Tilt to Standing	Yes
Trendelenburg	Yes
Chair Position Legs Down	Yes
Chair Position Legs Up	Yes
Scale	Yes
Weight Bearing Control System	Yes
Bed Exit Alarm	Option
Nurse Call	Available: Foam, Air, LAL, AP,



Mattress	CLRT
Mattress CPR	Yes
Patient Controls	Yes, Siderails
Patient Controls Lockable	Yes
Alternate Staff Controls	Yes Siderails
Headboard releases for CPR	Yes
Electronic CPR Function	Yes
Fold Down Gas Siderails	Yes
IV Pole, Trapeze, Oxygen Tank Holder	Options
Straight Line Steering Casters	Yes
Hand Pendant	Yes

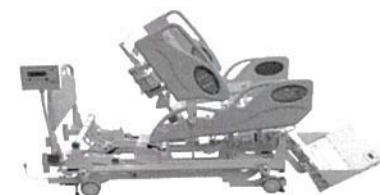

Unique Features:

Early Mobility Mode Tilts Bed to Full Standing	Yes to 82°
Force Plate for Mobility Exercises in Sitting	Yes
Electronic Adjustable Footboard	Yes
Weight Bearing Control System	Yes
Support Straps for Early Mobility	Yes
Can Expose Under Bed for Proper Cleaning	Yes
Casters Auto Retract from Ground During Use	Yes
Early Mobility Protocols Available	Yes
Software Bypass Mode	Yes
Bio Feedback Screen on Forceplate	Yes



Testing and Conformity: IEC 60601-1
2005/ EN60601-1:2006 (third edition)/
60601-2-52 (first edition)